

A STUDY ON PROPERTIES OF CONCRETE MADE WITH RECYCLED CONCRETE AND ADMIXTURES

Dr.Eccleston

Assistant Professor, Department of Civil Engineering

Christu Jyothi Institute of Technology and Science, Yeswantpur, Warangal.

Vaagdevi College of Engineering, Bollikunta, Warangal.

ABSTRACT:

Recycled aggregates are gotten from smashing pulverized concrete. They involve squashed, evaluated inorganic particles prepared from the materials that have been utilized in the development and decimation flotsam and jetsam. The go for this task is to decide the quality normal for recycled aggregates and the impact of characteristic admixtures on recycled total concrete, which will give a superior comprehension on the properties of concrete with recycled aggregates, as an elective material to coarse total in auxiliary concrete. The extent of this venture is to decide and look at the quality of concrete by utilizing diverse level of recycled aggregates with various sorts of admixtures for various purposes.

The utilization of recycled aggregates in concrete opens a radical new scope of conceivable outcomes in the reuse of materials in the building business. This could be an imperative achievement for our general public in our undertakings towards maintainable improvement. Squander concrete can be delivered from various diverse sources. The most widely recognized are destruction ventures. Many concrete structures like structures, scaffolds, walkways and streets are bulldozed after a timeframe into their administration life for reason for replacement or scene changes. Different wellsprings of waste incorporate catastrophic events like tremors, torrential slides, and tornadoes; human causes like war and shelling; and auxiliary disappointments. All these add to immense amounts of waste concrete that must be overseen somehow or another.

The primary point of the present experimentation is upgrading the execution of recycled total concrete using beneficial cementitious materials. Created by supplanting normal aggregates by recycled aggregates in different rates. Three distinctive valuable cementitious materials are utilized for examination. The goal of the examination is to enhance the properties of concrete created with recycled total.

1.0. INTRODUCTION

The building business can act in a respective way. From one perspective it must be considered as a reasonable generator of an extraordinary amount of buildups and on alternate, its long custom characterizes its ability of re-utilizing its very own loss as well as the loss from different parts of industry, this limit of recuperation is absolutely what is expected to advance in our present society.

The utilization of recycled aggregates in concrete opens a radical new scope of potential outcomes in the reuse of materials in the building business. This could be a critical leap forward for our general public in our undertakings towards maintainable improvement. Presently multi day, reusing is increasing more extensive consideration as a feasible alternative for the treatment of waste concrete. The concrete business puts a substantial interest on essential assets. It is evaluated that 165 million tones of total are utilized for concrete every year. This is viewed as unsustainable because of ecological effect and asset consumption. Consequently, it has turned out to be fundamental towards the turn of the century to build up innovation for a self reusing framework for concrete whereby materials for concrete are regrouped from obliterated concrete. Squander concrete can be created from various diverse sources.

The most well-known are obliteration ventures. Many concrete structures like structures, scaffolds, walkways and streets are flattened after a timeframe into their administration life for reason for replacement or scene changes. Different wellsprings of waste incorporate catastrophic events like seismic tremors, torrential slides, and tornadoes; human causes like war and bombarding; and basic disappointments.

All these add to huge amounts of waste concrete that must be overseen somehow or another. Recycled concrete is essentially old concrete that has been pounded to deliver total. It has been attractively utilized in street development as a total in granular sub bases, lean concrete sub bases, and concrete asphalts. Likewise, it is utilized as a total in soil bond and in new concrete as the main wellspring of total or as an incomplete replacement of new total.

The concrete produced using recycled total concrete for the most part has indistinguishable properties from

stone or rock total. The recycled concrete total is lighter and more permeable than regular aggregates. Recycled total will have higher drying shrinkage than the regular aggregates.



(a) Concrete containing RA



(b) RA particles with variable grain sizes

Fig. 1. Recycled aggregate concrete and distribution of variable grain sizes of RA particle.

The concrete made from recycled concrete aggregate generally has good durability and resistance to freeze-thaw action. It is necessary to utilize recycled aggregate as concrete aggregates for the effective utilization of concrete waste.

2.0. METHODOLOGY

2.1. MATERIALS

For the proposed experimental work, the basic ingredients of concrete were from locally available sources. The details regarding source and properties of each of the materials used in the experimental work is given below:

Cement: The cement used was fresh and without any lumps of grade 53. The testing of cement was done as per IS 8112:1989. The specific gravity of cement was found to be 3.05. The physical properties of cement used are as given in table 1.

Table 1: Physical properties of cement.

Particulars	Experimental result
Fineness	248 m ² /kg
Soundness (Le Chatelier mould)	10 mm
Temperature during testing	28 ⁰ C

Fine aggregate. The sand used for the experimental program was locally procured and was conforming to zone-III.

Table 2: Physical properties of fine aggregate.

Description of properties	Values for Fine aggregates
Specific gravity	2.62
Bulk density (rodded)	1.6325 kg/lt
Zone	III

Natural Coarse aggregate: The coarse aggregate from gravel origin were used in experiment with specific gravity. C.A. of size 20mm and down was used obtained from local stone quarries.

Recycled Coarse aggregate: The source for recycled aggregate was field demolished concrete. Waste concrete from locally demolished buildings were

collected and taken to a stone crushing unit for recycling. The concrete crushed in jaw crushers and of size 20mm down were used for the experimental work.

Table 3: Physical properties of natural and recycled coarse aggregate.

Description of properties	Values for Natural aggregates	Values for Recycled aggregates
Specific gravity	2.91	2.5
Fineness modulus	1.083	7.482
Bulk density (rodded)	1.764 kg/lit	1.642 kg/lit
Los Angeles abrasion value	8.36%	25.79%
Crushing value	21.42%	27.2%

Super plasticizer admixture. The super plasticizer used is a sulphonated naphthalene based polymer liquid admixture, Complast SP 430 is used. It was added at the rate of 0.4% by weight of cement.

2.2. CASTING OF MOULDS

Specimens were cast as per BIS methods to evaluate the strength properties of the three supplementary cementations material recycled aggregate concretes. The specimen casted for

- Compressive Strength Test:
- Flexural Strength Test
- Water Absorption Test

The mix proportion used was 1:1.5:3:0.45

3.0. EXPERIMENTAL RESULTS

The following tables give the test results of silica fume when natural aggregates are replaced by recycled aggregates in different percentages that are 0, 10, 20,30, 40, 50, 60, 80 and 100.

3.1. WORKABILITY

From the result gives the workability values in terms of slump, compaction factor for concrete when natural aggregates are replaced by recycled aggregates in different percentages.

Fig 2: Variation in Slump for various percentages of recycled aggregates SFRAC.

Table 5: Compaction factor results for different replacement of recycled aggregates

Recycled aggregate replaced in % to weight of CA	Compaction factor
0	0.92
10	0.914
20	0.902
30	0.895
40	0.864
50	0.81
60	0.749
80	0.72
100	0.69

Table 4: Slump for different replacement of recycled aggregates

Recycled aggregate replaced in % to weight of CA	Slump (mm)
0	64
10	60
20	48
30	44
40	39
50	35
60	32
80	28
100	27

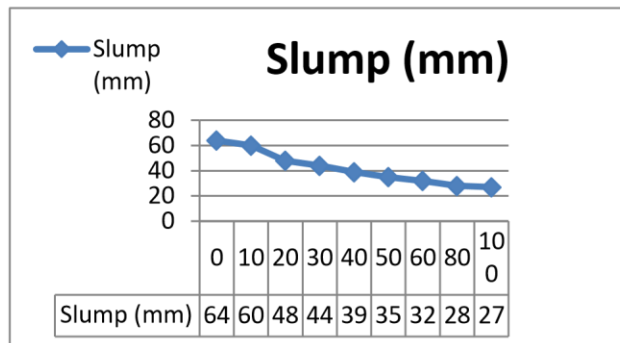


Table 6: Strength results for different replacement of recycled aggregates

Recycled aggregate replaced in % to weight of CA	Compressive Strength (Mpa)	Flexural Strength (Mpa)
0	24.2	6.72
10	26.1	6.19
20	23.1	5.78
30	22.24	5.49
40	18.84	5.38
50	18.21	5.21
60	17.75	5.03
80	17.42	4.91
100	16.12	4.76

recycled aggregates

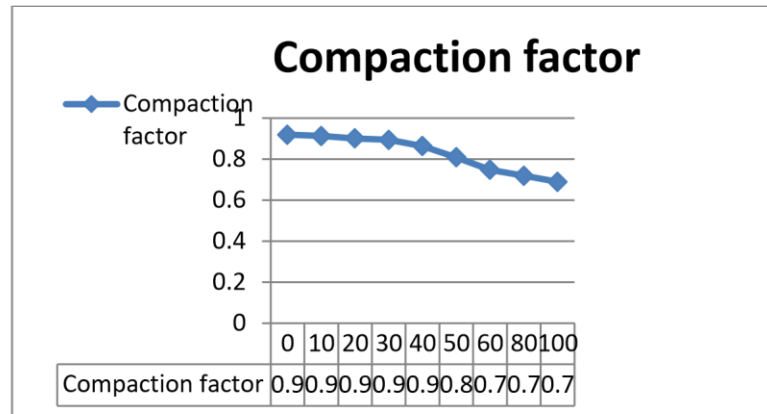


Fig. 3. Variation in Compaction factor for various percentages of RA.

3.2. STRENGTH OF HARD CONCRETE

The following tables give the compressive strength and flexural strength test results of SFRAC when natural aggregates are replaced by recycled aggregates in different percentages and normally cured for 28 days.

Compressive Strength (Mpa)


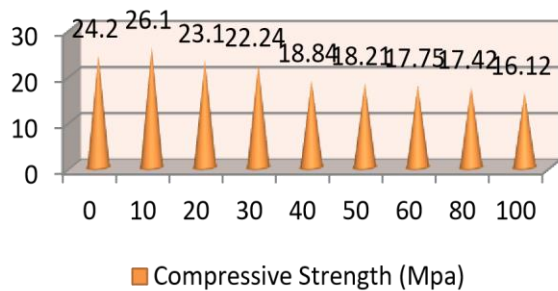


Fig. 4. Variation in Compressive Strength cured for 28 days for various percentages of RA.


Table 7 Fig. 6. Water Absorption for different replacement of recycled aggregates

Recycled aggregate replaced in % to weight of CA	Water Absorption
0	0.201
10	0.224
20	0.236
30	0.289
40	0.342
50	0.356
60	0.398
80	0.446
100	0.512

Water Absorption

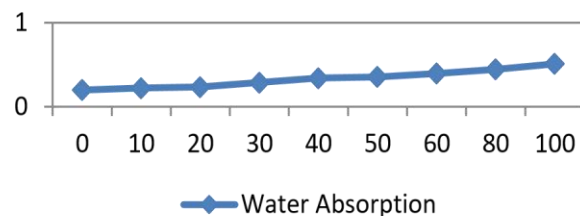

Flexural Strength (Mpa)

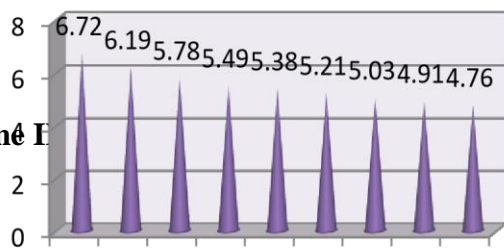

Volumé I

percentageso
4.0.CONCLUSIONS

The following conclusions are made

- From the Workability test results it is seen that the droop and compaction factor of SFRAC, continues diminishing, as the rate

Fig. 5. Variation in Flexural Strength for various This might be because of reality that percentages of RA. recycled aggregate may ingest more water due to increasingly porous structure of

3.3.

WATER ABSORPTION recycled aggregate. End might be made that the usefulness of recycled aggregate

The following table gives the overall results of water concrete goes diminishes as the rate absorption of Silica Fume when natural aggregates substitution of common aggregates by are replaced by recycled aggregates in different recycled aggregates continues expanding.

percentages like 0, 10, 20, 30, 40, 50, 60, 80 and 100.

Looking at the outcomes it is seen that the functionality of in additional.

- From the Compressive strength test results it is seen that the compressive strength for all the three advantageous cementitious concretes, SFRAC increments, between 10% to 30% substitution of common aggregate by